

Pannel Lighting Led Spotlight

EXPOLIGHT



3
YEARS
WARRANTY

Projector equipped with a 50 cm rod and an adjustable 270° anti-glare head, Tilttable up to 90 °.

The fixture's head integrates an LED COB as well as a high efficiency reflector.

Passive thermal dissipation through external heatsink, thus ensuring the longevity of the LED.


Light fitting equipped with a clamping fixing system with tightening screw, for panels from 20 to 45mm.

LED Driver Box equipped with 2 JST18 input/output WIELAND connectors for chained power supplies (up to 30 spotlights).

Supplied without 230V power cable (see accessories).

Option: Dimming potentiometer (larger box).

Available in Duo version for 2-sided panels.

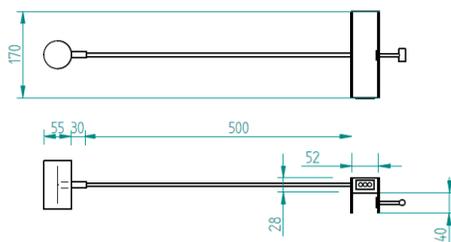

**MANUFACTURING
DESIGN**

Technical specifications

Light source type	LED
Wattage	10W
Beam angle	36°
Color temperature (Step Macadam SDCM 2)	4 000K
Led lumen output	1 200 lm
LED Color Rendering Index	90
Lumen maintenance L80B10	50 000 operating hours
Dimming/control	Optional potentiometer
Thermal dissipation	Passive
Housing materials	Aluminium – painted steel
Weight	1 Kg
Finition	Black - White - Grey



SPX Lighting - 10 rue des Marronniers 94 240 L'Hay Les Roses - France.

Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts au +33 01 82 33 02 80 - contact@spx-lighting.com - www.spx-lighting.com

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.

Date of publication March 2023

VERSION 23A

