

## LEXYS Range



**5**  
**YEARS**  
**WARRANTY**


# LEXYS

Indoor spotlight, equipped with a high output Led.  
Holding positions by tightening the locking pin  
Tilt angle 320°  
Tieback mounting : Azimuth 365°.  
3 Circuits track adaptor mounting : Azimuth 350°  
(365° optional).  
Accessories: barn doors and filter holder.  
Control : On board dimming, Casambi, DALI2,  
Phase-cut.  
Mounting possibilities : track adaptor and tie back  
mounting





## Technical specifications

|                           |   |
|---------------------------|---|
| Light source type         | LED   |
| Led Power Rating          | 13 W  |
| Beam angle                | 14° or 25° or 31°                                 |
| Color temperature (SDCM2) | 3 000 K - 4 000 K                                 |
| Led nominal output        | 1 190 lm - 1 290 lm                               |
| CRI (Ra)                  | 98 98   |
| R9                        | > 90  |
| Lumen maintenance L80B10  | 110 000 operating hours                           |
| Dimming/control           | Potentiometer / Phase cut / DALI 2<br>Casambi     |
| Thermal dissipation       | Passive   |
| Housing materials         | Body : anodized aluminium –<br>painted steel      |
| Weight                    | 0,950 kg  |
| Finish                    | Black or White - Other RAL colors<br>upon request |

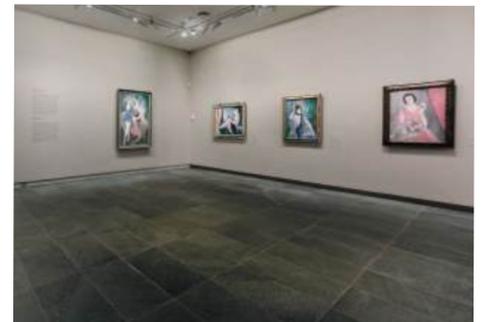

Orangerie Museum - Art in Paris exhibition  
Marie Laurencin Room. - @SPX LIGHTING



SPX Lighting - Offices : Magellan 7 rue Montespan 91 000 Evry Courcouronnes - France

Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - [contact@spx-lighting.com](mailto:contact@spx-lighting.com) - [www.spx-lighting.com](http://www.spx-lighting.com)

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.


Date of publication February 2026.

VERSION 26B







### 3 Circuits Track Adaptor

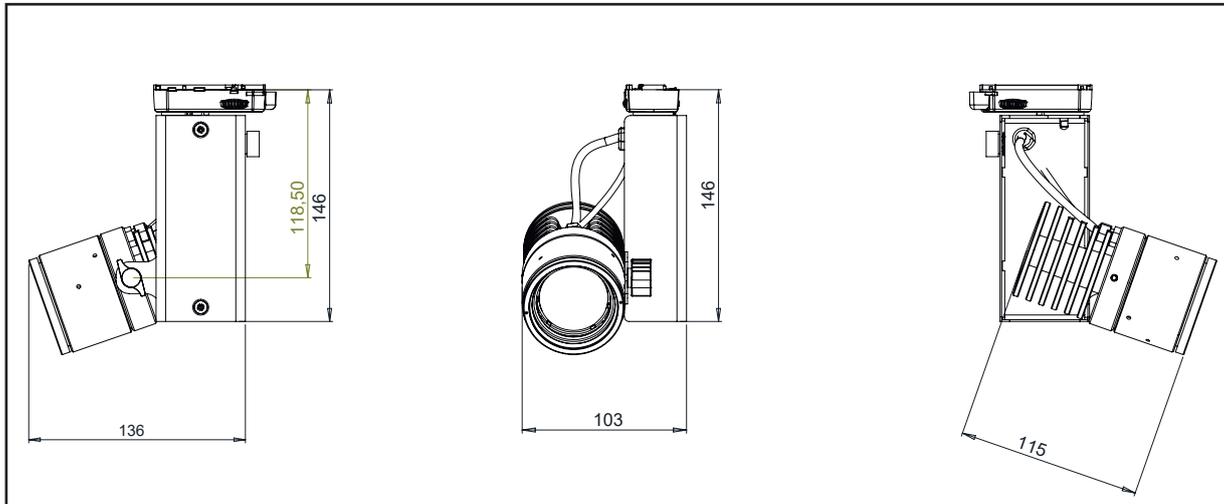


### Tieback

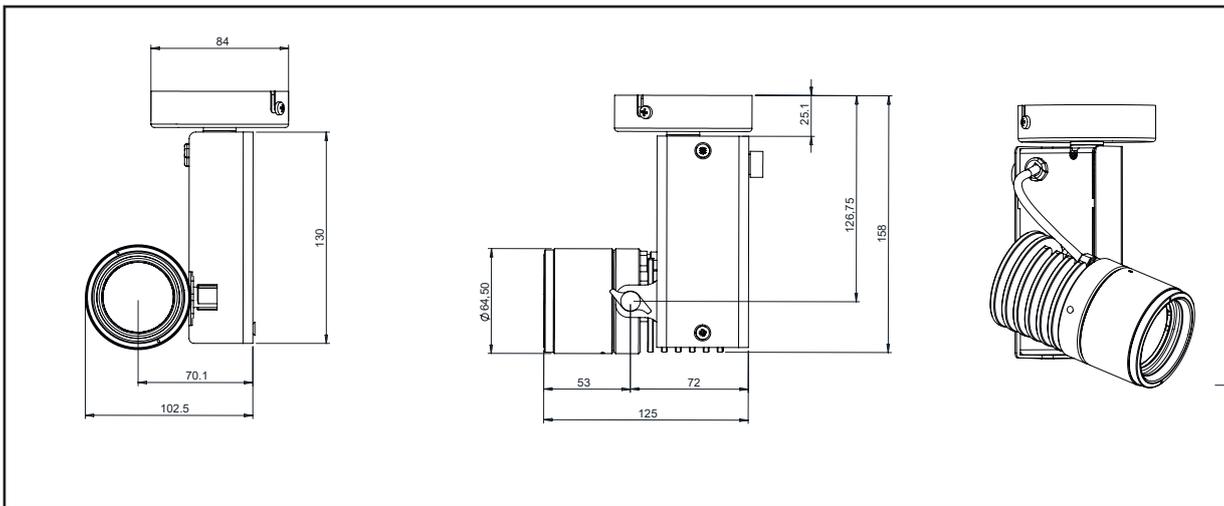

## Accessories



Barndoors



Filter holder









Source: COB 3000K

Date: 22/07/2022

Manufacturer: SPX LIGHTING

Model: LEXYS 3000K

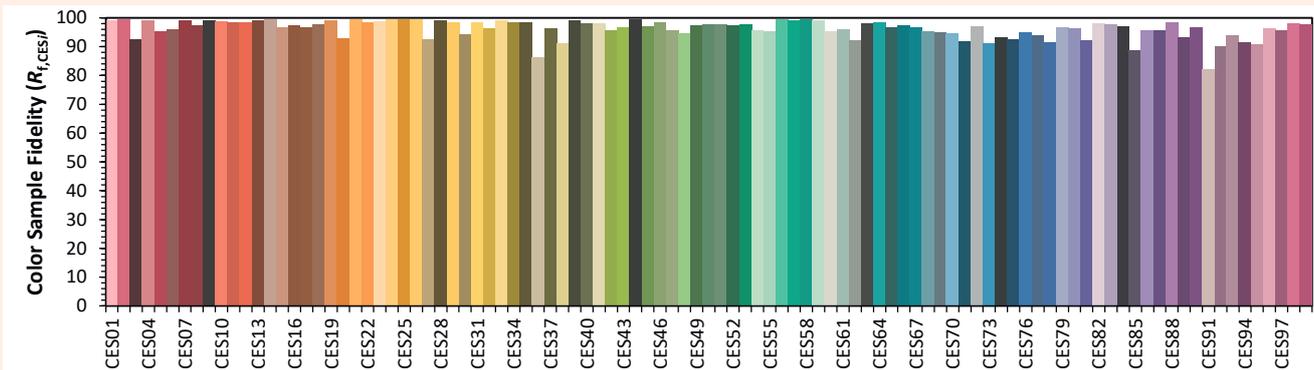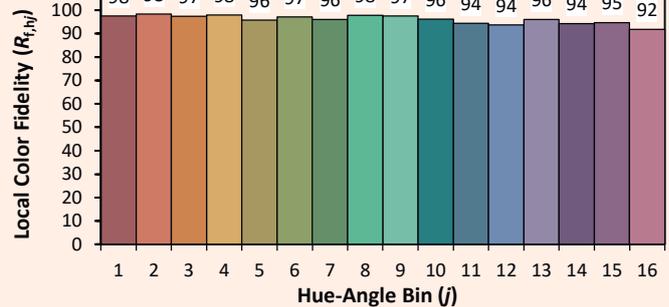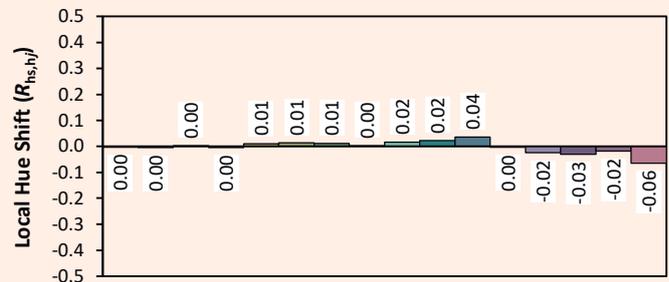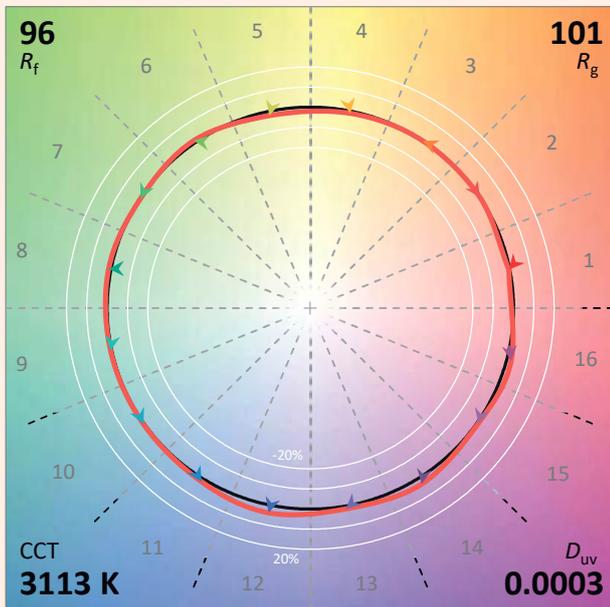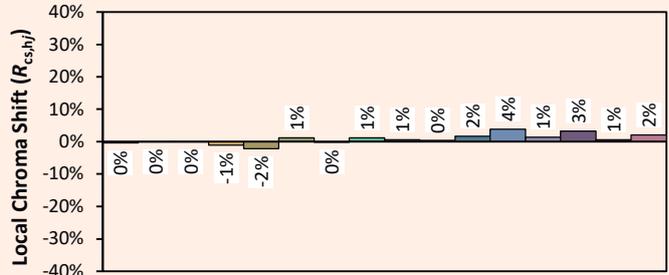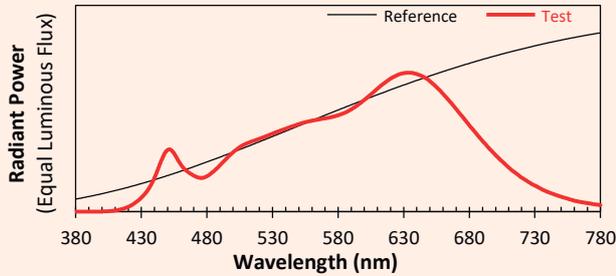

Notes:

Indicative values varying around the typical value.

x 0.4296  
y 0.4022  
u' 0.2466  
v' 0.5196

|                     |    |
|---------------------|----|
| CIE 13.3-1995 (CRI) |    |
| R <sub>a</sub>      | 98 |
| R <sub>g</sub>      | 96 |



SPX Lighting - Offices : Magellan 7 rue Montespan 91 000 Evry Courcouronnes - France

Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - contact@spx-lighting.com - www.spx-lighting.com

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.

Date of publication February 2026.  
VERSION 26B











Source: COB 4000K

Date: 22/07/2022

Manufacturer: SPX LIGHTING

Model: LEXYS 4000K

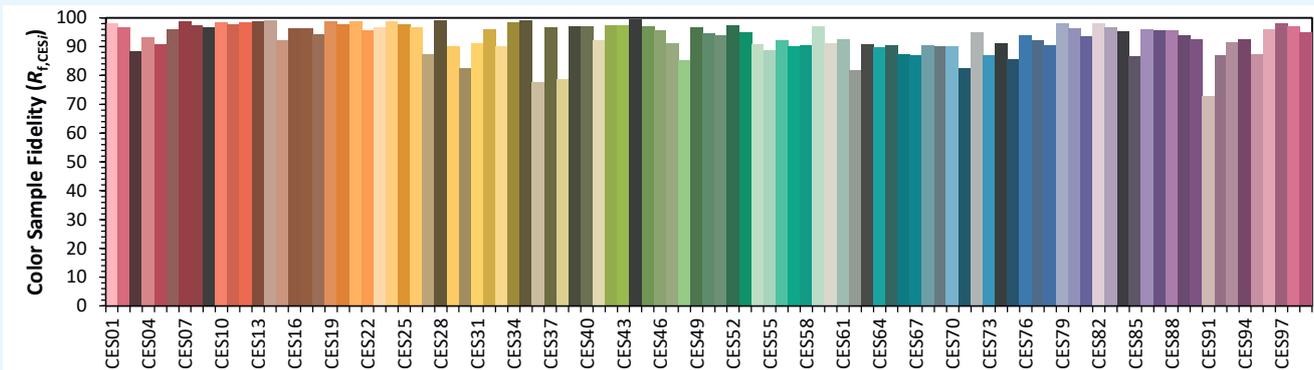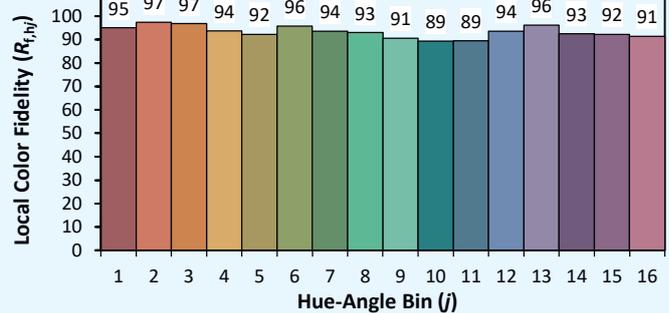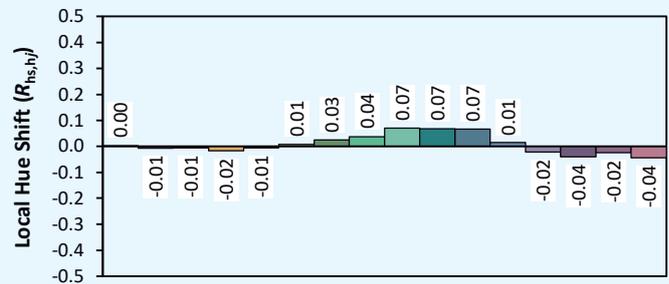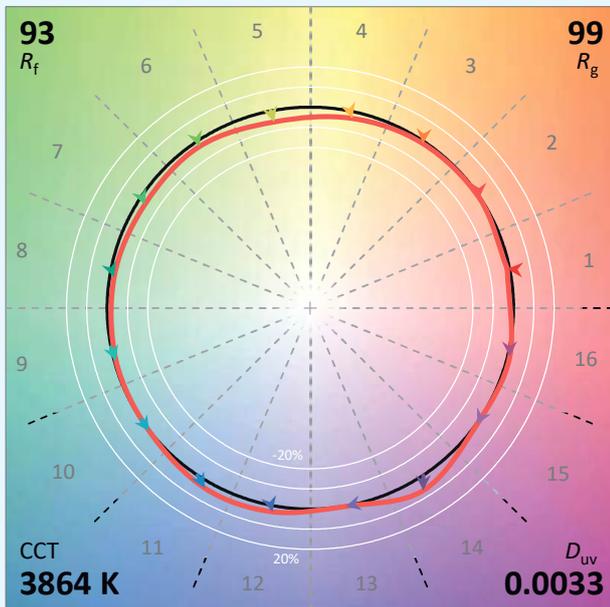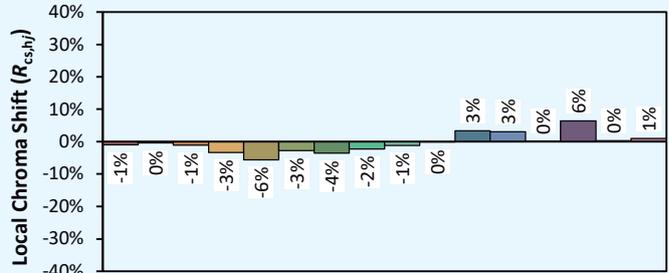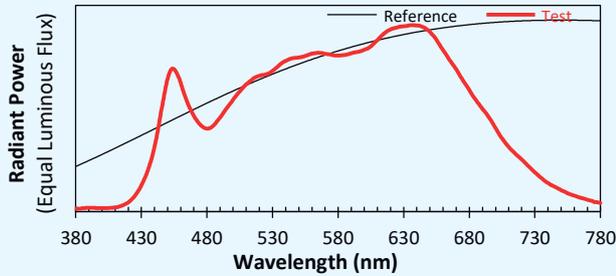

Notes:

Indicative values varying around the typical value.

x 0.3893  
 y 0.3893  
 u' 0.2259  
 v' 0.5083

CIE 13.3-1995 (CRI)

|       |    |
|-------|----|
| $R_a$ | 97 |
| $R_g$ | 94 |



SPX Lighting - Offices : Magellan 7 rue Montespan 91 000 Evry Courcouronnes - France


Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - contact@spx-lighting.com - www.spx-lighting.com


All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.

VERSION 26B



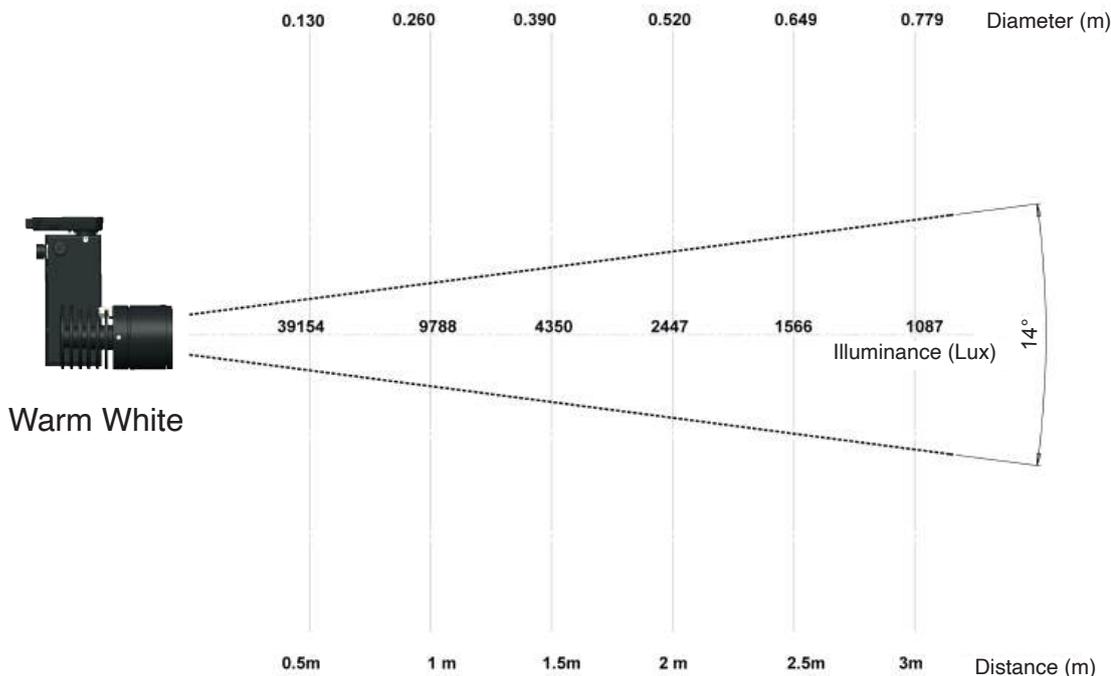

LEXYS 3000K 14°

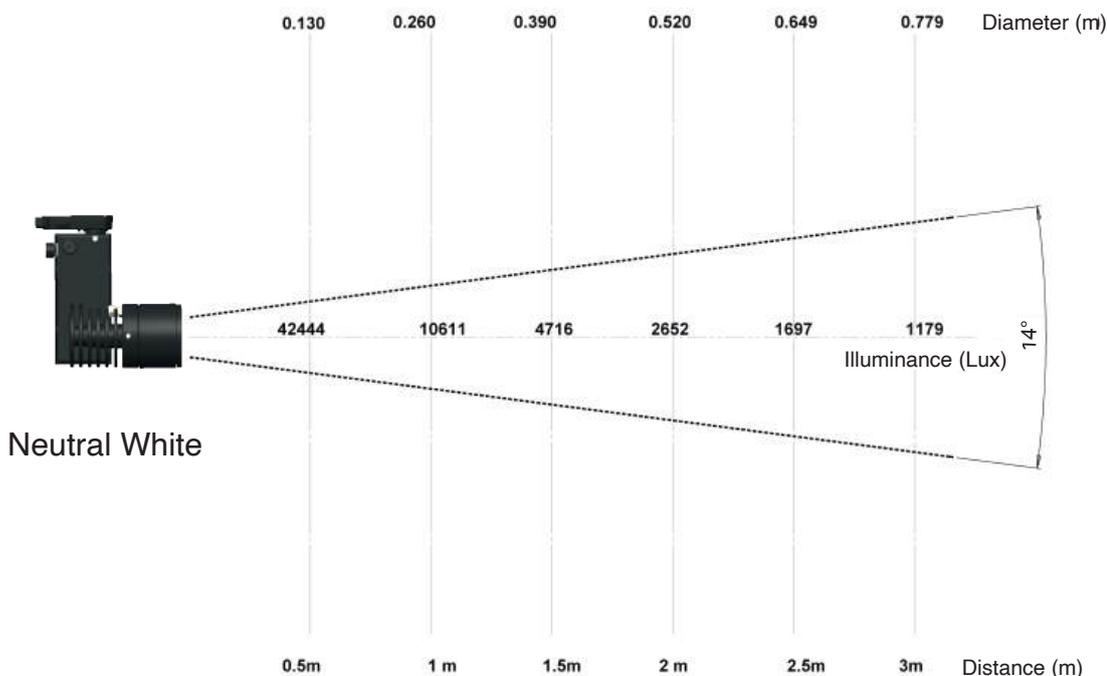

LEXYS 4000K 14°



SPX Lighting - Offices : Magellan 7 rue Montespan 91 000 Evry Courcouronnes - France

Factory : Zac des Coinchettes - 36 100 Issoudun - France.


Contacts +33 01 82 33 02 80 - [contact@spx-lighting.com](mailto:contact@spx-lighting.com) - [www.spx-lighting.com](http://www.spx-lighting.com)

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.


Date of publication February 2026.

VERSION 26B



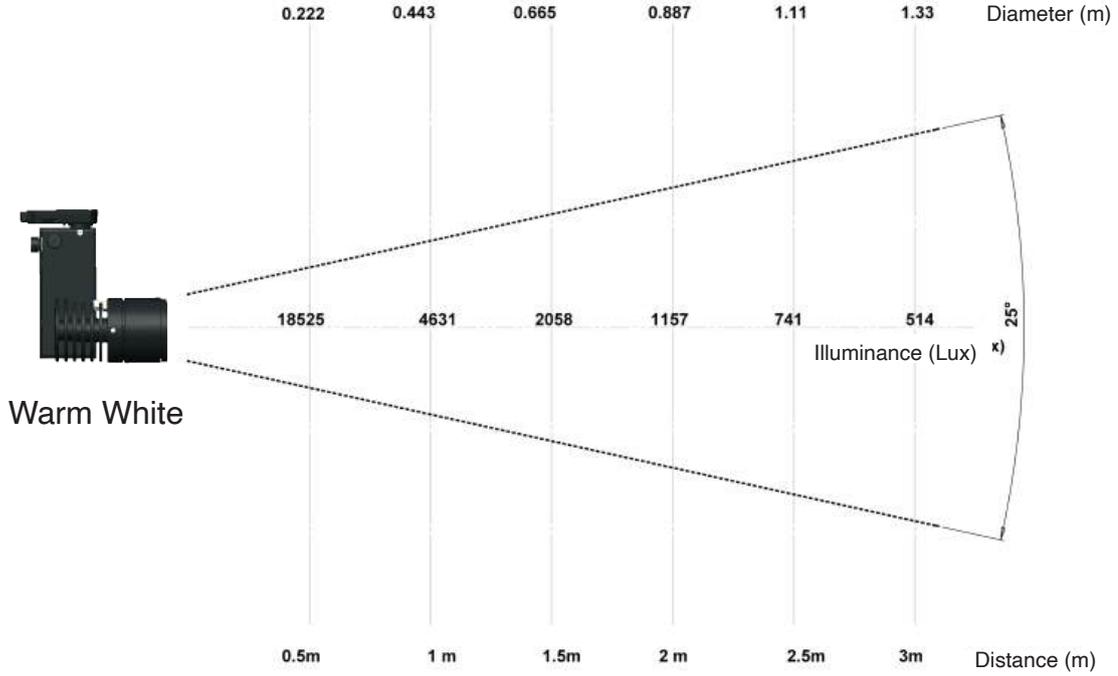

LEXYS 3000K 25°

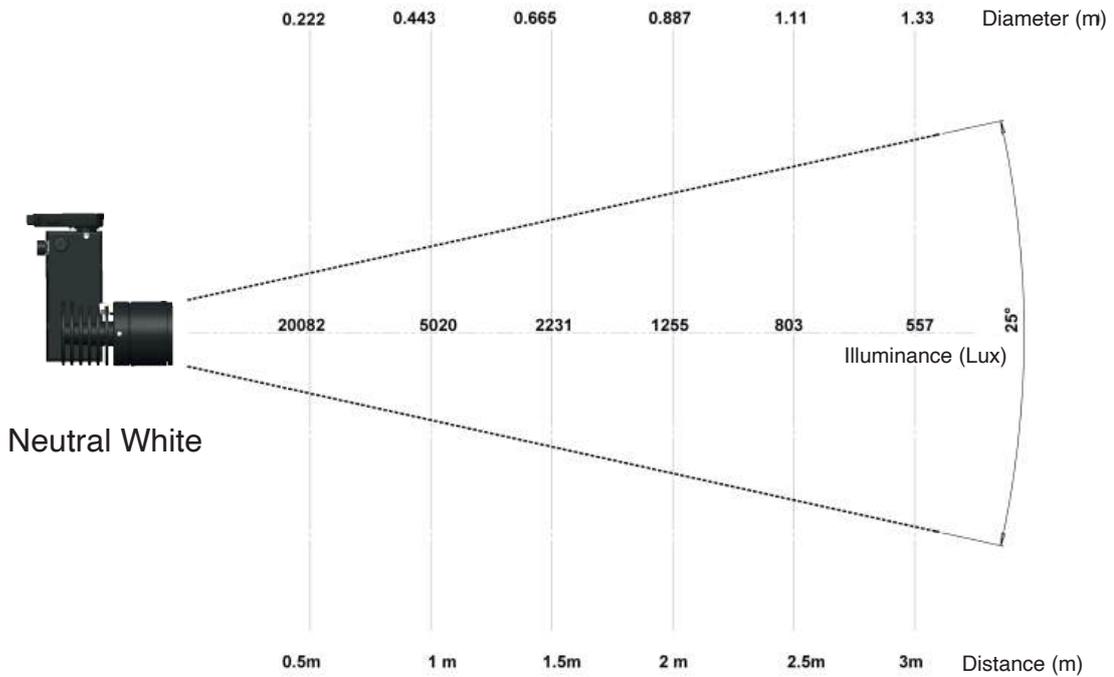

LEXYS 4000K 25°



SPX Lighting - Offices : Magellan 7 rue Montespan 91 000 Evry Courcouronnes - France


Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - [contact@spx-lighting.com](mailto:contact@spx-lighting.com) - [www.spx-lighting.com](http://www.spx-lighting.com)


All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.

VERSION 26B



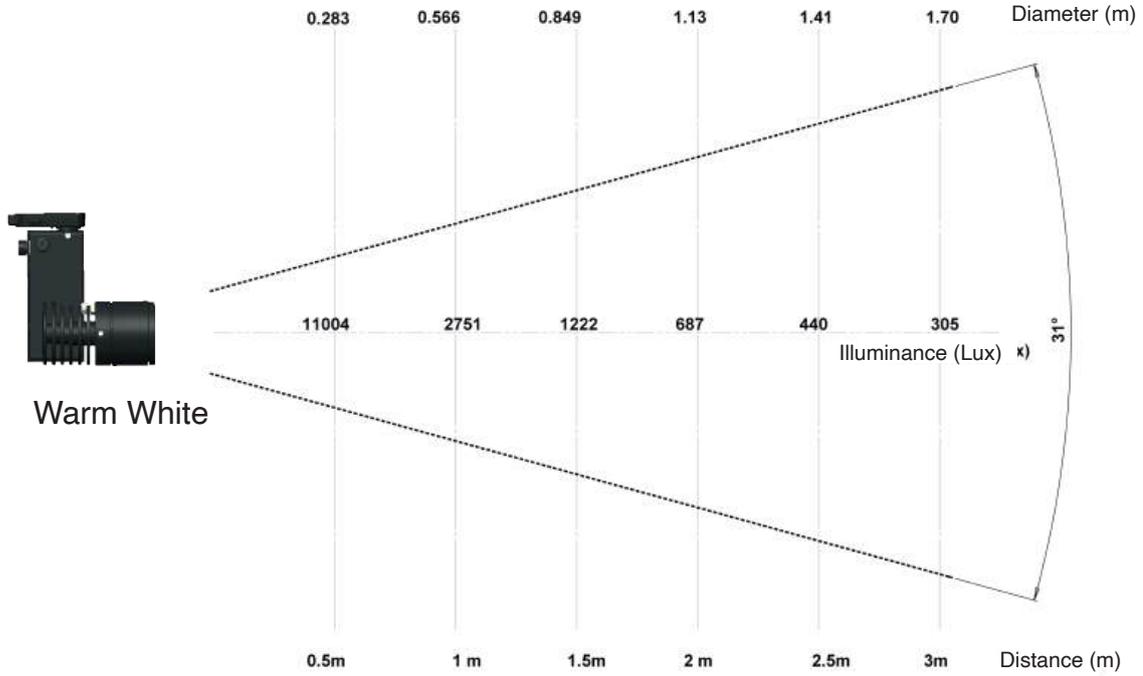

LEXYS 3000K 31°

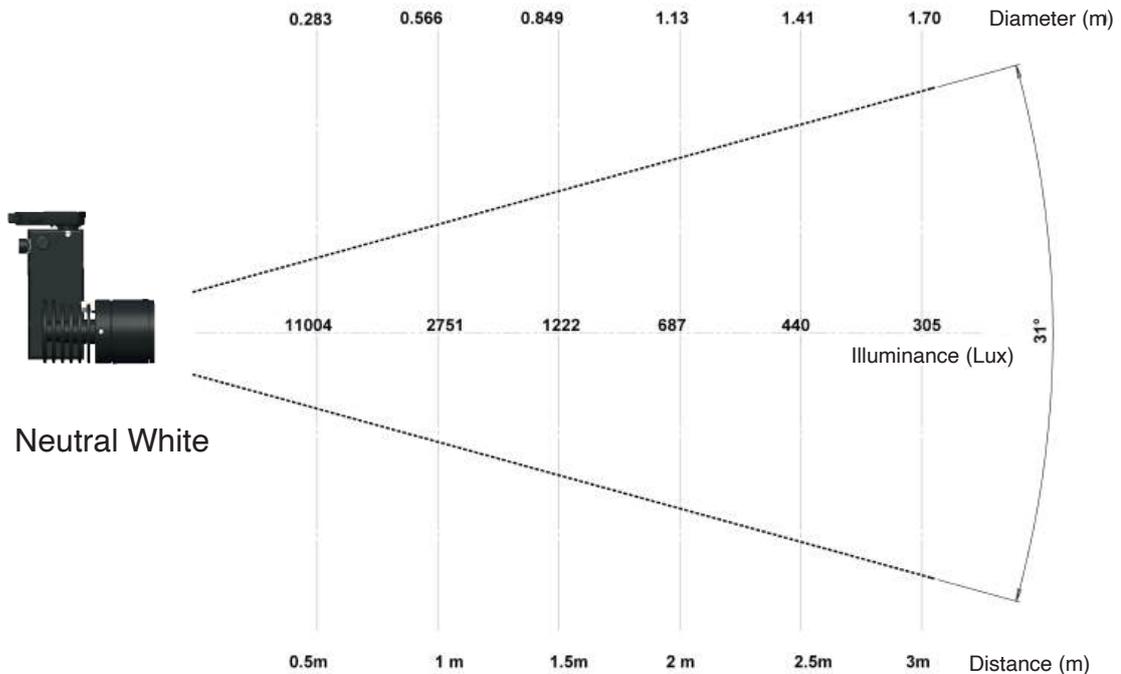

LEXYS 4000K 31°



SPX Lighting - Offices : Magellan 7 rue Montespan 91 000 Evry Courcouronnes - France

Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - [contact@spx-lighting.com](mailto:contact@spx-lighting.com) - [www.spx-lighting.com](http://www.spx-lighting.com)

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.

Date of publication February 2026.

VERSION 26B





## Items References

| Power Consumption | Mounting Versions          | Dimming/Contr | Beam Angle | Color temperature | Black Finish | White Finish |
|-------------------|----------------------------|---------------|------------|-------------------|--------------|--------------|
| 15W               | 3 circuits track Adaptator | Potentiometer | 14°        | Warm white        | PRI01050     | PRI01051     |
| 15W               | 3 circuits track Adaptator | Potentiometer | 14°        | Neutral white     | PRI01052     | PRI01053     |
| 15W               | 3 circuits track Adaptator | Potentiometer | 25°        | Warm white        | PRI01054     | PRI01055     |
| 15W               | 3 circuits track Adaptator | Potentiometer | 25°        | Neutral white     | PRI01056     | PRI01057     |
| 15W               | 3 circuits track Adaptator | Potentiometer | 31°        | Warm white        | PRI01058     | PRI01059     |
| 15W               | 3 circuits track Adaptator | Potentiometer | 31°        | Neutral white     | PRI01060     | PRI01061     |
| 15W               | 3 circuits track Adaptator | DALI          | 14°        | Warm white        | PRI01062     | PRI01063     |
| 15W               | 3 circuits track Adaptator | DALI          | 14°        | Neutral white     | PRI01064     | PRI01065     |
| 15W               | 3 circuits track Adaptator | DALI          | 25°        | Warm white        | PRI01066     | PRI01067     |
| 15W               | 3 circuits track Adaptator | DALI          | 25°        | Neutral white     | PRI01068     | PRI01069     |
| 15W               | 3 circuits track Adaptator | DALI          | 31°        | Warm white        | PRI01070     | PRI01071     |
| 15W               | 3 circuits track Adaptator | DALI          | 31°        | Neutral white     | PRI01072     | PRI01073     |
| 15W               | 3 circuits track Adaptator | CASAMBI       | 14°        | Warm white        | PRI01378     | PRI01379     |
| 15W               | 3 circuits track Adaptator | CASAMBI       | 14°        | Neutral white     | PRI01380     | PRI01381     |
| 15W               | 3 circuits track Adaptator | CASAMBI       | 25°        | Warm white        | PRI01382     | PRI01383     |
| 15W               | 3 circuits track Adaptator | CASAMBI       | 25°        | Neutral white     | PRI01384     | PRI01385     |
| 15W               | 3 circuits track Adaptator | CASAMBI       | 31°        | Warm white        | PRI01386     | PRI01387     |
| 15W               | 3 circuits track Adaptator | CASAMBI       | 31°        | Neutral white     | PRI01388     | PRI01389     |
| 15W               | 3 circuits track Adaptator | PHASE CUT     | 14°        | Warm white        | PRI01074     | PRI01075     |
| 15W               | 3 circuits track Adaptator | PHASE CUT     | 14°        | Neutral white     | PRI01076     | PRI01077     |
| 15W               | 3 circuits track Adaptator | PHASE CUT     | 25°        | Warm white        | PRI01078     | PRI01079     |
| 15W               | 3 circuits track Adaptator | PHASE CUT     | 25°        | Neutral white     | PRI01080     | PRI01081     |
| 15W               | 3 circuits track Adaptator | PHASE CUT     | 31°        | Warm white        | PRI01082     | PRI01083     |
| 15W               | 3 circuits track Adaptator | PHASE CUT     | 31°        | Neutral white     | PRI01084     | PRI01085     |
| 15W               | TIEBACK 365°               | Potentiometer | 14°        | Warm white        | PRI01328     | PRI01329     |
| 15W               | TIEBACK 365°               | Potentiometer | 14°        | Neutral white     | PRI01330     | PRI01331     |
| 15W               | TIEBACK 365°               | Potentiometer | 25°        | Warm white        | PRI01332     | PRI01333     |
| 15W               | TIEBACK 365°               | Potentiometer | 25°        | Neutral white     | PRI01334     | PRI01335     |
| 15W               | TIEBACK 365°               | Potentiometer | 31°        | Warm white        | PRI01336     | PRI01337     |
| 15W               | TIEBACK 365°               | Potentiometer | 31°        | Neutral white     | PRI01338     | PRI01339     |
| 15W               | TIEBACK 365°               | DALI          | 14°        | Warm white        | PRI01340     | PRI01341     |
| 15W               | TIEBACK 365°               | DALI          | 14°        | Neutral white     | PRI01342     | PRI01343     |
| 15W               | TIEBACK 365°               | DALI          | 25°        | Warm white        | PRI01344     | PRI01345     |
| 15W               | TIEBACK 365°               | DALI          | 25°        | Neutral white     | PRI01346     | PRI01347     |
| 15W               | TIEBACK 365°               | DALI          | 31°        | Warm white        | PRI01348     | PRI01349     |
| 15W               | TIEBACK 365°               | DALI          | 31°        | Neutral white     | PRI01350     | PRI01351     |
| 15W               | TIEBACK 365°               | CASAMBI       | 14°        | Warm white        | PRI01850     | PRI01851     |
| 15W               | TIEBACK 365°               | CASAMBI       | 14°        | Neutral white     | PRI01852     | PRI01853     |
| 15W               | TIEBACK 365°               | CASAMBI       | 25°        | Warm white        | PRI01854     | PRI01855     |
| 15W               | TIEBACK 365°               | CASAMBI       | 25°        | Neutral white     | PRI01856     | PRI01857     |
| 15W               | TIEBACK 365°               | CASAMBI       | 31°        | Warm white        | PRI01858     | PRI01859     |
| 15W               | TIEBACK 365°               | CASAMBI       | 31°        | Neutral white     | PRI01860     | PRI01861     |
| 15W               | TIEBACK 365°               | PHASE CUT     | 14°        | Warm white        | PRI01862     | PRI01863     |
| 15W               | TIEBACK 365°               | PHASE CUT     | 14°        | Neutral white     | PRI01864     | PRI01865     |
| 15W               | TIEBACK 365°               | PHASE CUT     | 25°        | Warm white        | PRI01866     | PRI01867     |
| 15W               | TIEBACK 365°               | PHASE CUT     | 25°        | Neutral white     | PRI01868     | PRI01869     |
| 15W               | TIEBACK 365°               | PHASE CUT     | 31°        | Warm white        | PRI01870     | PRI01871     |
| 15W               | TIEBACK 365°               | PHASE CUT     | 31°        | Neutral white     | PRI01872     | PRI01873     |



SPX Lighting - Offices : Magellan 7 rue Montespan 91 000 Evry Courcouronnes - France

Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - [contact@spx-lighting.com](mailto:contact@spx-lighting.com) - [www.spx-lighting.com](http://www.spx-lighting.com)

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.

Date of publication February 2026.

VERSION 26B





## Accessories References

|                                |          |
|--------------------------------|----------|
| Black barn doors (RAL 9005)    | ACC00359 |
| White barn doors (RAL 9010)    | ACC00360 |
| Black filter holder (RAL 9005) | ACC00369 |
| White filter holder (RAL 9010) | ACC00370 |



SPX Lighting Factory - Issoudun - France



**SPX Lighting** - Offices : Magellan 7 rue Montespan 91 000 Evry Courcouronnes - France

Factory : Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - [contact@spx-lighting.com](mailto:contact@spx-lighting.com) - [www.spx-lighting.com](http://www.spx-lighting.com)

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.

Date of publication February 2026.

**VERSION 26B**

