

MICROCAD 230

Indoor Micro-framing projector. Fitted with a 3 circuits track adaptor.

Framing by 4 shutters.

Tilt angle: 100°. Azimuth: 350°.

Rotatable optical zoom (360°).

Integrated filter holder.





Technical specifications

Light source type Led Power Rating Beam angle

Color temperature (Step Macadam SDCM2)

Led nominal output

CRI (Ra)

R9

Lumen maintenance L80B10

Dimming/control Thermal dissipation Housing materials

Weight Finish

LED 6 W

10° to 20° - 25° to 35° - 35° to 50°

3 000 K - 4 000 K 630 lm - 692 lm

98

> 90

60 000 operating hours

Integrated potentiometer on the spot

Passive

Body: anodized aluminium -

painted steel

0,550 kg (10°/20° version)

Black (Anodized) - White RAL 9010

or RAL color upon request



DIOR Gallery - Paris - Lighting Designer ACL - @Alexis Coussement

On the Spot



























Factory: Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - contact@spx-lighting.com - www.spx-lighting.com

All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held label for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights. Date of publication MAY 2023.




MICROCAD 230



Mounting versions

3 Circuits Track Adaptor

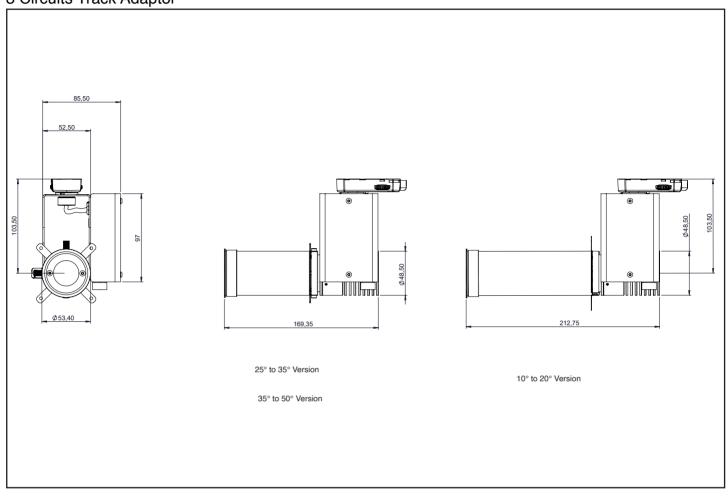






MICROCAD 230

Colorimetry Data

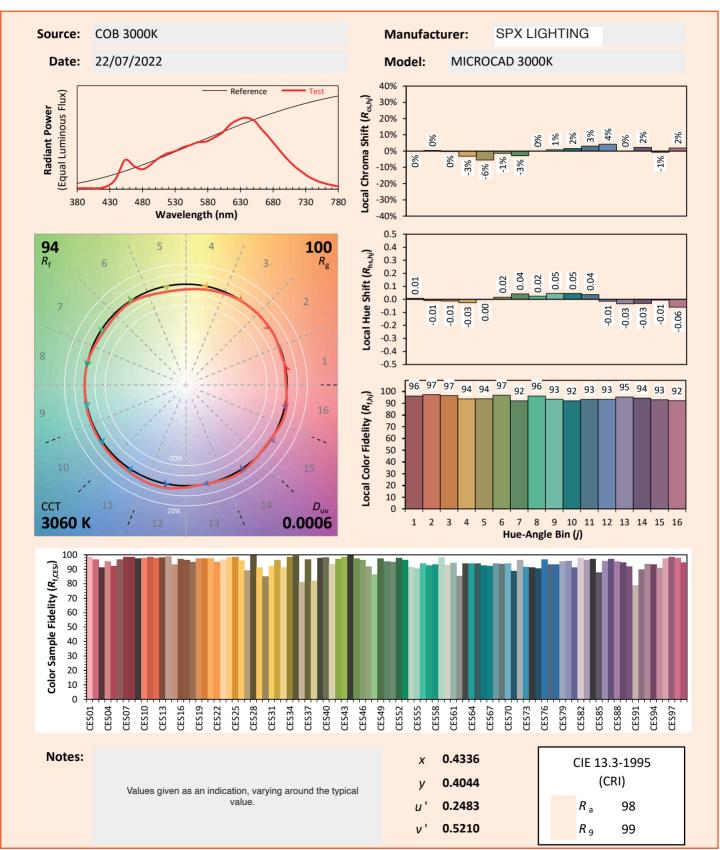



VERSION 23A

SPX Lighting - Offices: 10 rue des Marronniers 94 240 L'Hay Les Roses - France.

Factory: Zac des Coinchettes - 36 100 Issoudun - France.

Contacts +33 01 82 33 02 80 - contact@spx-lighting.com - www.spx-lighting.com
All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting. Information contained in this document does not contractually bind SPX Lighting. Despite the care SPX Lighting brings to the accuracy and precision of the present information, the responsibility of SPX Lighting cannot be sought in case of inaccurate information. SPX Lighting reserves the right to change this information at any time without prior notice. SPX Lighting cannot be held liable for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights.


Date of publication MMY 2023.



MICROCAD 230



Colorimetry Data

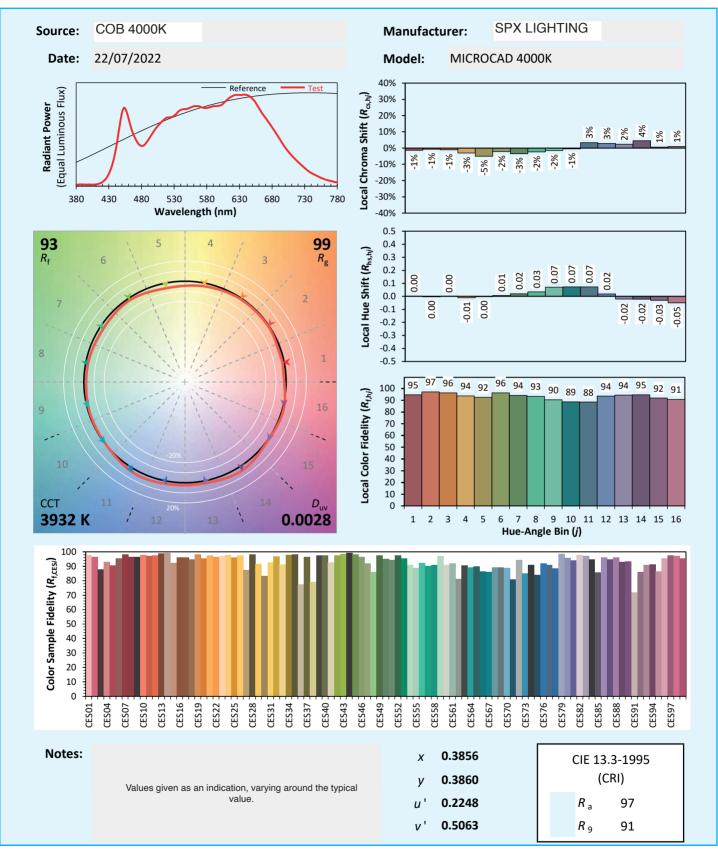



VERSION 23A

SPX Lighting - Offices: 10 rue des Marronniers 94 240 L'Hay Les Roses - France. Factory: Zac des Coinchettes - 36 100 Issoudun - France.



Contacts +33 01 82 33 02 80 - contact@spx-lighting.com - www.spx-lighting.com
All rights reserved. Partial or complete reproductions is prohibited unless written permission of SPX Lighting, Information contained in this document does not contractually bind 5 precision of the present information, the responsibility of SPX Lighting can not be sought in case of inaccurate information. SPX Lighting reserves the right to change this informat for the consequences of the use of the present document. This publication does not imply any transfer of intellectual property rights. Date of publication MAY 2023.



MICROCAD 230



Items References

Power Consumption	Mouting Versions	Dimming/Control	Zoom	Color Temperature	Black Finish	White Finish
8W	3 circuits track adaptator	Potentiometer	35° to 50°	Warm White	CAI00022	CAI00023
8W	3 circuits track adaptator	Potentiometer	35° to 50°	Neutral White	CAI00024	CAI00025
W8	3 circuits track adaptator	Potentiometer	25° to 35°	Warm White	CAI00026	CAI00027
8W	3 circuits track adaptator	Potentiometer	25° to 35°	Neutral White	CAI00028	CAI00029
8W	3 circuits track adaptator	Potentiometer	10° to 20°	Warm White	CAI00030	CAI00031
8W	3 circuits track adaptator	Potentiometer	10° to 20°	Neutral White	CAI00032	CAI00033



SPX Lighting Factory - Issoudun - France



